Project_____
Item No_____
Quantity_____

MODEL CRTE Electric Countertop Rethermalizer

Standard Accessories

CONSTRUCTION

- Stainless steel cabinet.
- Marine grade 316 stainless steel tank.
- Quick disconnect drain fitting.
- Integrated drain screen to prevent clogging.
- CRTE Tank Dims: 12” x 18-1/2” x 8-1/2”

CONTROLS

- ON/OFF/RESET switch.
- Digital control with temperature display.
- Manual reset, high temperature protection. If the unit runs out of water and the tank overheats, the heating circuit is disabled until the ON/OFF/RESET switch is pressed to RESET.

STANDARD ACCESSORIES

- Display controller with temperature display
- Drain hose with shut off valve
- Four (4) product soup racks
  P/N# B4512001 (11” x 7-1/2” x 1-3/8”)
- Stainless steel tank and cabinet
- Power cord supplied;
  - □ Shrouded twist lock (NEMA L6-30P)
  - □ Twist lock (NEMA L6-30P)
  - □ Pin and sleeve
  - □ 90° straight blade (NEMA 6-30P)
- 24 volt receptacle and mounting pins for product timer

Note: NCC product timer not supplied by Pitco

OPERATIONS

- Tank holds (6) gallons (22.7 liters) of water.
- Automatic temperature control.
- Rethermalizes prepared packaged foods.

APPROVALS

- NSF Listed (24100-0008-000)
- cUL Approved (E55456)
- UL Listed (E55456)

Optional Rack/ Basket Chart					
Part No.	Description	Inside Product Opening (W x H x D)	Qty Per Tank	Product Per Basket	Total Product Capacity
B4516101	Suitcase	11-3/8” x 10” x 2-1/2”	5	---	--
B4513501	Basket	11-1/4” x 7-3/4” x 2-1/2” (Tapered)	2	3	6
B4513401	Tank Screen (prevents bags from tearing when not in suitcase, basket or rack.)				

• Pitco Frialator, Inc • P.O. Box 501, Concord, NH 03302-0501 •
603-225-6684 • FAX: 603-225-8497 • www.pitco.com
L10-132 Rev 9 05/16 Printed in the USA

Model CRTE Electric Countertop Rethermalizer

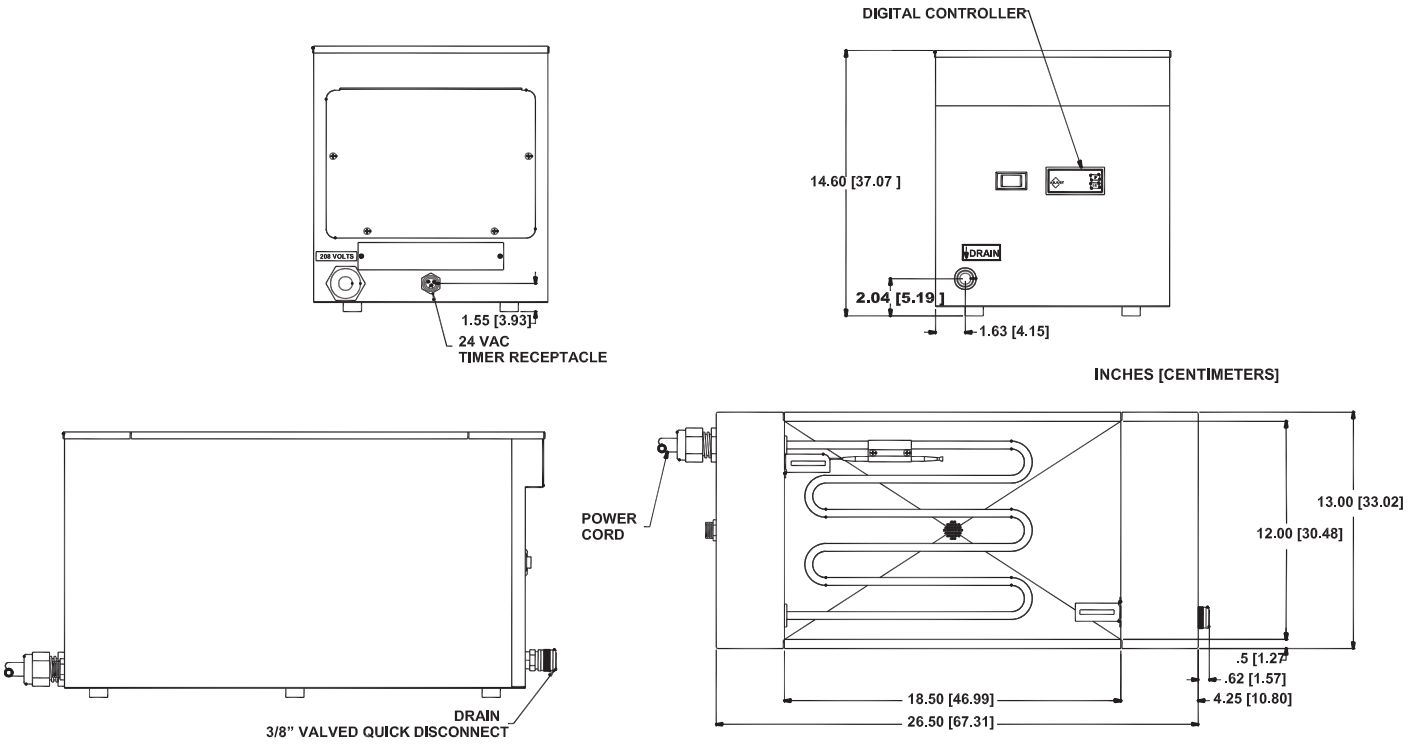

ELECTRIC COUNTERTOP RETHERMALIZER			
ELECTRIC		**WATER CAPACITY**	**COOK DEPTH**
Voltage/HZ/PHASE	AMPS/EA	6 Gallons (22.7 liters)	8 1/2" (22 cm)
208/60/1	29.8		
240/60/1	25		
SHIPPING INFORMATION (Approximate)			
60 pounds (27.2 kg)/6.3 cubic feet (0.18 cubic meters)			
ELECTRIC INPUT		PERFORMANCE CHARACTERISTICS	
6 kW		Rethermalizes prepared packaged food.	

SHORT FORM SPECIFICATIONS

Provide Pitco Model CRTE Electric Countertop Rethermalizer. Unit shall have the ability to heat water and maintain thermostatically controlled temperature. Tank shall be constructed of type 316 stainless steel and hold 6 gallons (22.7 liters) of water with front drain. Entire cabinet shall be constructed of stainless steel. Provide accessories as follows:

TYPICAL APPLICATION

Typical Application-Rethermalizing pre-cooked/packaged food products.

• Pitco Frialator, Inc • P.O. Box 501, Concord, NH 03302-0501 •
603-225-6684 • FAX: 603-225-8497 • www.pitco.com
L10-132 Rev 9 05/16 Printed in the USA